

ASSEMBLY & INSTALLATION INSTRUCTIONS

TABLE OF CONTENTS

pg. 2-5	CIRCA TABLE
pg. 6-9	CIRCA FLOOR
pg. 10-13	CIRCA PEDESTAL
pg. 14-17	CIRCA WALL
pg. 18-21	CIRCA PENDANT
pg. 22-25	CIRCA CHANDELIER
pg. 26-32	CIRCA GROMMET
ng 33-36	CIRCA FLUSH





ASSEMBLY & INSTALLATION INSTRUCTIONS






ASSEMBLY



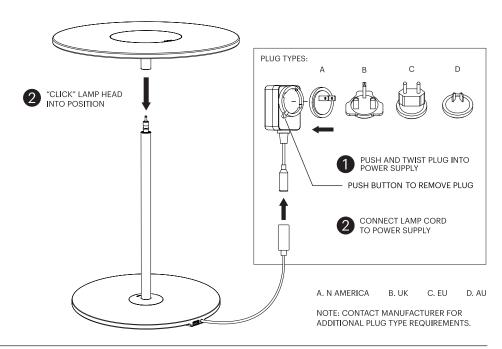

CIRCA TABLE SWITCH AND USB CHARGING

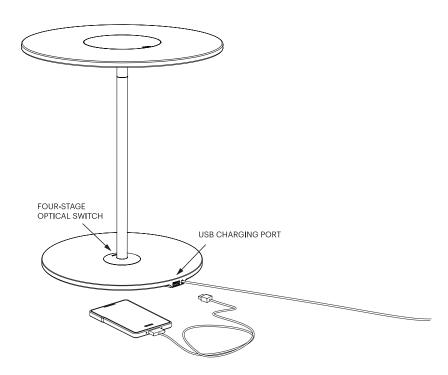

HIGHLIGHTS

SINGLE 5.0V USB OUTPUT SUPPORTS CHARGING FOR SMARTPHONES, TABLETS AND OTHER MOBILE DEVICES.

SPECIFICATIONS

USB 2.0 OR 1.1 STANDARD CORD REQUIRED (CORD NOT INCLUDED) OUTPUT VOLTAGE: 5VDC + - 5% OUTPUT CURRENT: 1A MAX

NOTE

CIRCA TABLE WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE "OFF" POSITION.

PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN FROM LEAVING YOUR DEVICE PLUGGED IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IT MAY RESULT IN OVER CHARGING.

PRESS AND HOLD OPTICAL SWITCH FOR 1.5 SECONDS TO TURN OFF. TAP BRIEFLY TO CYCLE THROUGH FOUR STAGES.

CARE INSTRUCTIONS


WIPE CLEAN WITH A SOFT DAMP CLOTH. AVOID AMMONIA-BASED CLEANERS.

NOTE

THIS LAMP IS NOT RECOMMENDED FOR DAMP LOCATIONS.

Pablo* CIRCA TABLE

ADJUSTMENT



INFO@PABLODESIGNS.COM 888 MARIN STREET SAN FRANCISCO, CA 94124

PABLODESIGNS.COM

CIRCA FLOOR

ASSEMBLY & INSTALLATION INSTRUCTIONS

INFO@PABLODESIGNS.COM 888 MARIN STREET SAN FRANCISCO, CA 94124

PABLODESIGNS.COM






Pablo° CIRCA FLOOR


ASSEMBLY

- 1. SCREW LOWER STEM INTO BASE AS SHOWN
- 2. SCREW UPPER STEM INTO LOWER STEM AS SHOWN
- 3. "CLICK" LAMP HEAD INTO POSITION


OPTIONAL ACCESSORY

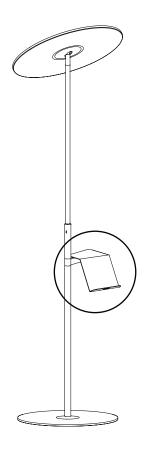


PEDESTAL FOR MOBILE DEVICES SOLD SEPARATELY (SEE PEDESTAL ASSEMBLY INSTRUCTIONS)

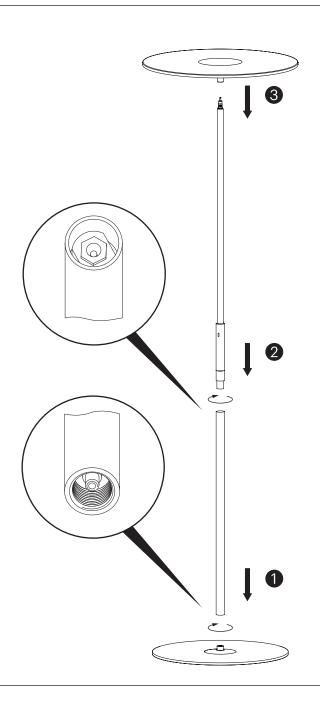

ADJUSTMENT

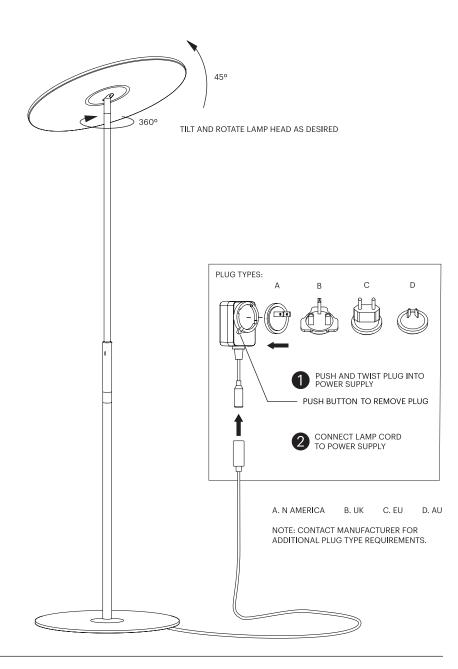

CIRCA FLOOR SWITCH AND USB CHARGING

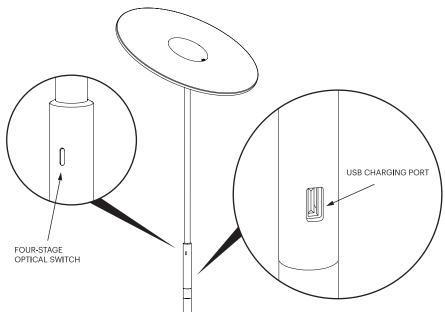

HIGHLIGHTS

SINGLE 5.0V USB OUTPUT SUPPORTS CHARGING FOR SMARTPHONES, TABLETS AND OTHER MOBILE DEVICES.

SPECIFICATIONS

USB 2.0 OR 1.1 STANDARD CORD REQUIRED (CORD NOT INCLUDED)
OUTPUT VOLTAGE: 5VDC + - 5%
OUTPUT CURRENT: 1A MAX

NOTE

CIRCA FLOOR WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE "OFF" POSITION.

PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN FROM LEAVING YOUR DEVICE PLUGGED IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IT MAY RESULT IN OVER CHARGING.

PRESS AND HOLD OPTICAL SWITCH FOR 1.5 SECONDS TO TURN OFF. TAP BRIEFLY TO CYCLE THROUGH FOUR STAGES.

ACCESSORIES

OPTIONAL PEDESTAL FOR MOBILE DEVICES

CARE INSTRUCTIONS

WIPE CLEAN WITH A SOFT DAMP CLOTH. AVOID AMMONIA-BASED CLEANERS.

NOTE

THIS LAMP IS NOT RECOMMENDED FOR DAMP LOCATIONS.

CIRCA PEDESTAL

ASSEMBLY & INSTALLATION INSTRUCTIONS


INFO@PABLODESIGNS.COM 888 MARIN STREET SAN FRANCISCO, CA 94124

PABLODESIGNS.COM






Pablo° CIRCA PEDESTAL

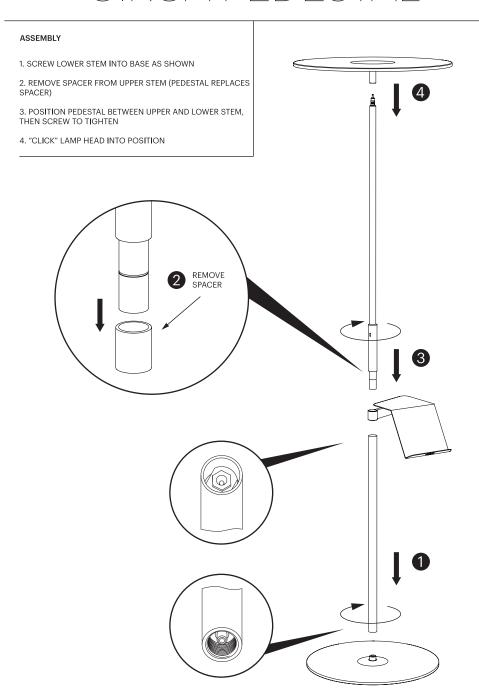


Pablo* CIRCA PEDESTAL

ADJUSTMENT

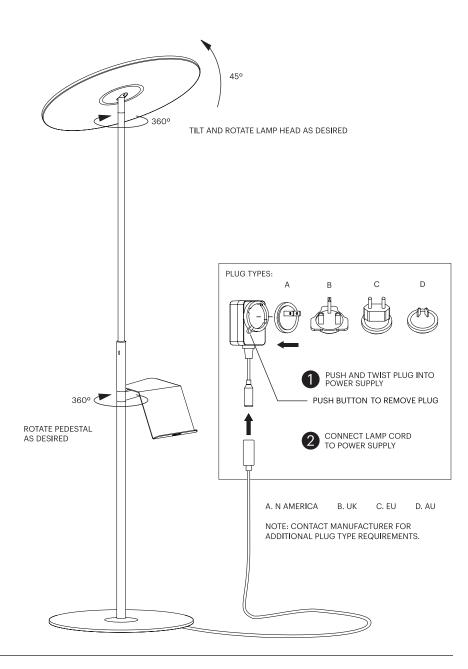

Pablo* CIRCA PEDESTAL

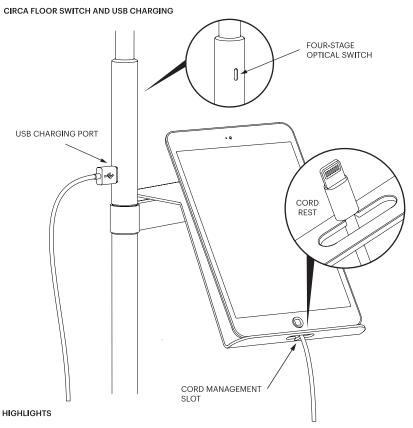

SINGLE 5.0V USB OUTPUT SUPPORTS CHARGING FOR SMARTPHONES, TABLETS AND OTHER MOBILE DEVICES.

SPECIFICATIONS

USB 2.0 OR 1.1 STANDARD CORD REQUIRED (CORD NOT INCLUDED)
OUTPUT VOLTAGE: 5VDC + - 5%
OUTPUT CURRENT: 1A MAX

NOTE

CIRCA PEDESTAL WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE "OFF" POSITION.

PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN FROM LEAVING YOUR DEVICE PLUGGED IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IT MAY RESULT IN OVER CHARGING.

PRESS AND HOLD OPTICAL SWITCH FOR 1.5 SECONDS TO TURN OFF. TAP BRIEFLY TO CYCLE THROUGH FOUR STAGES.

CARE INSTRUCTIONS

WIPE CLEAN WITH A SOFT DAMP CLOTH, AVOID AMMONIA-BASED CLEANERS.

NOTE

THIS LAMP IS NOT RECOMMENDED FOR DAMP LOCATIONS.



ASSEMBLY & INSTALLATION INSTRUCTIONS

INFO@PABLODESIGNS.COM 888 MARIN STREET SAN FRANCISCO, CA 94124


PABLODESIGNS.COM






CIRCA WALL






- A. LAMP HEAD
- B. FACEPLATE
- C. 4x MACHINE SCREWS
- D. LAMP ARM
- E. 4x SCREWS
- F. MOUNTING PLATE
- G. 4x WALL ANCHORS


USE THE MOUNTING PLATE AS A TEMPLATE FOR MARKING THE LOCATION OF THE WALL ANCHORS




2 REMOVE THE PLATE FROM THE WALL AND INSTALL ALL FOUR WALL ANCHORS



3 SCREW THE MOUNTING PLATE TO THE ANCHORS WITH THE SCREWS PROVIDED




SCREW LAMP ARM TO THE MOUNTING PLACE WITH THE FOUR MACHINE SCREWS PROVIDED




CIRCA WALL

ASSEMBLY

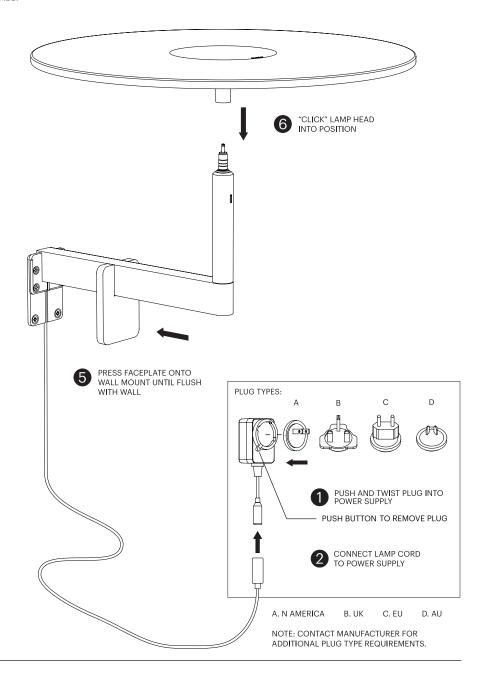

CIRCA WALL SWITCH AND USB CHARGING

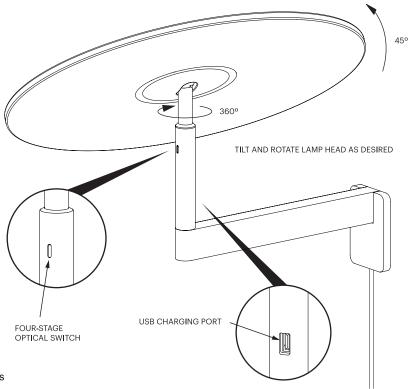

HIGHLIGHTS

SINGLE 5.0V USB OUTPUT SUPPORTS CHARGING FOR SMARTPHONES, TABLETS AND OTHER MOBILE DEVICES.

SPECIFICATIONS

USB 2.0 OR 11 STANDARD CORD REQUIRED (CORD NOT INCLUDED)
OUTPUT VOLTAGE: 5VDC +- 5%
OUTPUT CURRENT: 1A MAX

NOTE

CIRCA WALL WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE "OFF" POSITION.

PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN FROM LEAVING YOUR DEVICE PLUGGED IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IT MAY RESULT IN OVER CHARGING.

PRESS AND HOLD OPTICAL SWITCH FOR 1.5 SECONDS TO TURN OFF. TAP BRIEFLY TO CYCLE THROUGH FOUR STAGES.

CARE INSTRUCTIONS

WIPE CLEAN WITH A SOFT DAMP CLOTH. AVOID AMMONIA-BASED CLEANERS.

NOTE

THIS LAMP IS NOT RECOMMENDED FOR DAMP LOCATIONS.

CIRCA PENDANT

120V / 220V ASSEMBLY & INSTALLATION INSTRUCTIONS

INFO@PABLODESIGNS.COM 888 MARIN STREET SAN FRANCISCO, CA 94124

PABLODESIGNS.COM







CIRCA PENDANT

IMPORTANT: WE RECOMMEND FIXTURE BE INSTALLED BY AN ELECTRICIAN


WARNING: FIXTURE MUST BE WIRED CORRECTLY OR RISK DAMAGE TO COMPONENTS




NOTE: IF JUNCTION BOX IS NOT LOCATED IN THE DESIRED POSITION FOR CIRCA PENDANT, SEE BACK PAGE FOR SWAG MOUNT INSTALLATION



2 ROUTE FIXTURE AND BUILDING CORDS AS SHOWN, THEN PULL CIRCA PENDANT TO DESIRED HEIGHT AND SET STRAIN RELIEF



CUT FIXTURE CORD TO DESIRED LENGTH, ADDING AN ADDITIONAL 3 INCHES (7.6 CM) FOR WIRING





CIRCA PENDANT

4

BUILDING WIRING


CONNECT BUILDING WIRING TO 2 POLE CONNECTOR ON AC INPUT SIDE OF TRANSFORMER




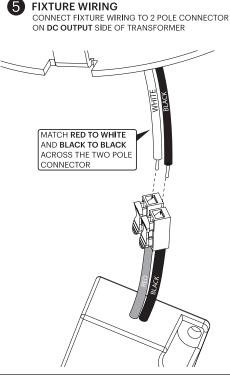



TUCK WIRES AND POLE CONNECTIONS INTO CANOPY COVER, THEN SLIDE COVER PLATE UP TO CEILING AND SECURE WITH SUPPLIED SCREWS



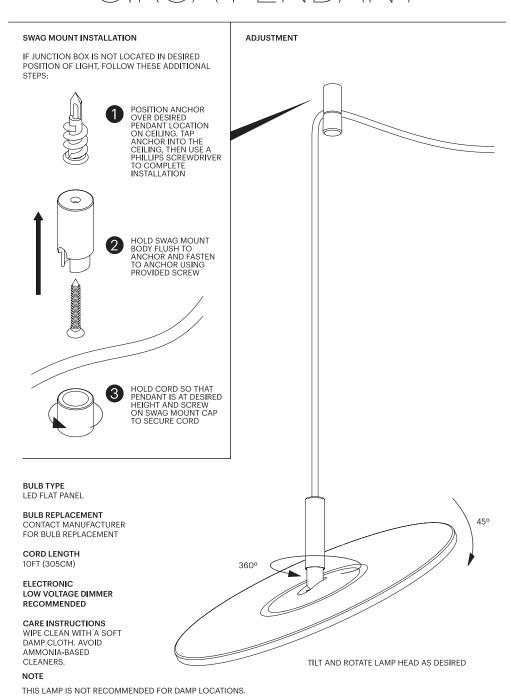

CIRCA CHANDELIER

120V ASSEMBLY & INSTALLATION INSTRUCTIONS

INFO@PABLODESIGNS.COM 888 MARIN STREET SAN FRANCISCO, CA 94124

PABLODESIGNS.COM







CIRCA CHANDELIER


IMPORTANT: WE RECOMMEND FIXTURE BE INSTALLED BY AN ELECTRICIAN. CIRCA CHANDELIER MUST BE SECURELY ANCHORED TO 150LBS RATED JUNCTION BOX OR MOUNTED TO CEILING STUDS.


SUGGESTED HANGING CONFIGURATIONS

- 1. DETERMINE APPROPRIATE HEIGHT ABOVE SURFACE FOR LOWEST LAMP
- 2. SPACE EACH LAMP 12 INCHES (30.5CM) ABOVE THE PREVIOUS LAMP
- 3. MOVE UPWARDS IN A SPIRAL PATTERN











CIRCA CHANDELIER 3







1 ROUTE BUILDING WIRING THROUGH MOUNTING PLATE





- 2 ATTACH PLATE TO JUNCTION BOX WITH PROVIDED JUNCTION BOX MACHINE SCREWS
- ANCHOR PLATE INTO CEILING STUDS
 WITH PROVIDED WOOD SCREWS IF
 POSSIBLE. IF NOT, USE PROVIDED
 CEILING ANCHORS AND WOOD SCREWS
 TO SECURE PLATE TO CEILING

NOTE: INSTALLATION REQUIRES STANDARD PHILLIPS HEAD SCREW DRIVER AND #2 FLAT HEAD SCREW DRIVER

CIRCA CHANDELIER


4 ALIGN HOLES ON MOUNTING PLATE WITH CORRESPONDING HOLES ON CANOPY COVER

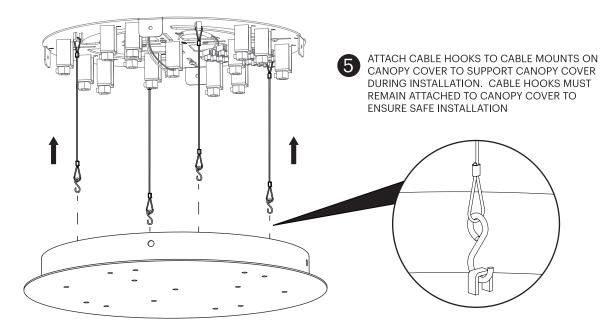


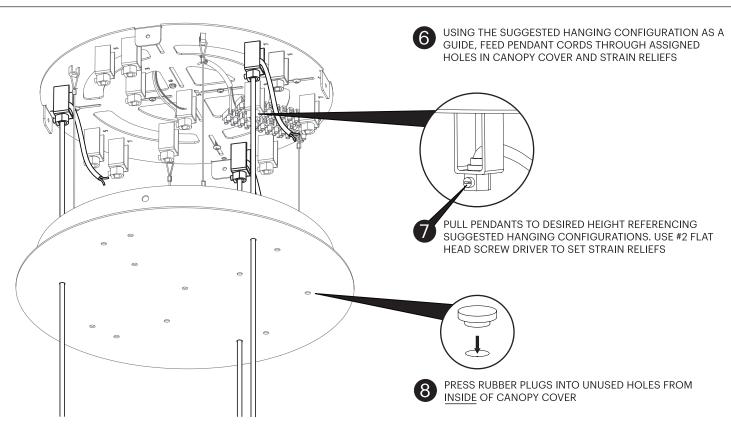

NOTE: INSTALLATION SHOWN IS FOR CIRCA CHANDELIER 3. FOR CIRCA CHANDELIER 5 AND 7, FOLLOW THE SAME WIRING PROCESS USING THE HOLE PLACEMENT OUTLINED IN SUGGESTED HANGING CONFIGURATIONS

CIRCA CHANDELIER

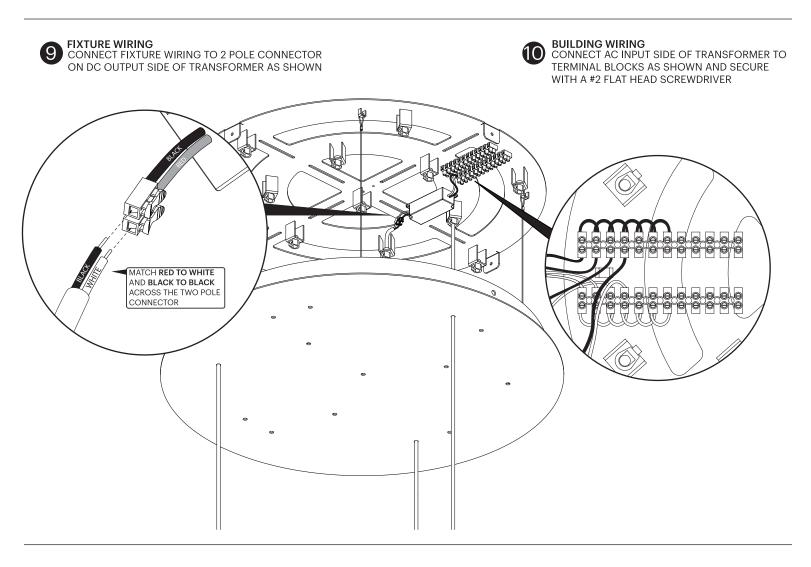

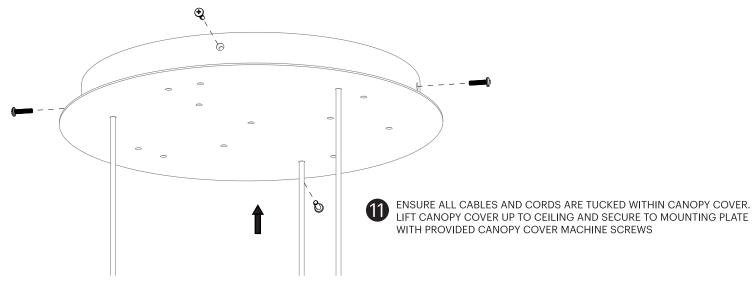


CIRCA GROMMET


ASSEMBLY & INSTALLATION INSTRUCTIONS



 ϵ

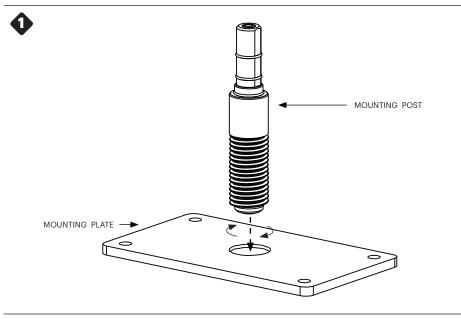





EN: CIRCA SWITCH AND USB CHARGING

◆ TILT AND ROTATE LAMP HEAD AS DESIRED

A FOUR-STAGE OPTICAL SWITCH

B USB CHARGING PORT

CARE INSTRUCTIONS

WIPE CLEAN WITH A SOFT DAMP CLOTH. AVOID AMMONIA-BASED CLEANERS.

HIGHLIGHTS

SINGLE 5.0V USB OUTPUT SUPPORTS CHARGING FOR SMARTPHONES AND OTHER SIMILAR MOBILE DEVICES.


SPECIFICATIONS


USB 2.0 OR 1.1 STANDARD CORD REQUIRED (CORD NOT INCLUDED)

OUTPUT VOLTAGE: 5VDC +/ - 5% OUTPUT CURRENT: 1A MAX

NOTE


CIRCA WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE "OFF" POSITION.
PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN
FROM LEAVING YOUR DEVICE PLUGGED IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IT MAY
RESULT IN OVER CHARGING.

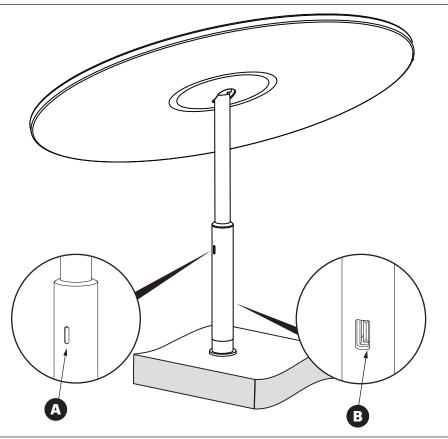

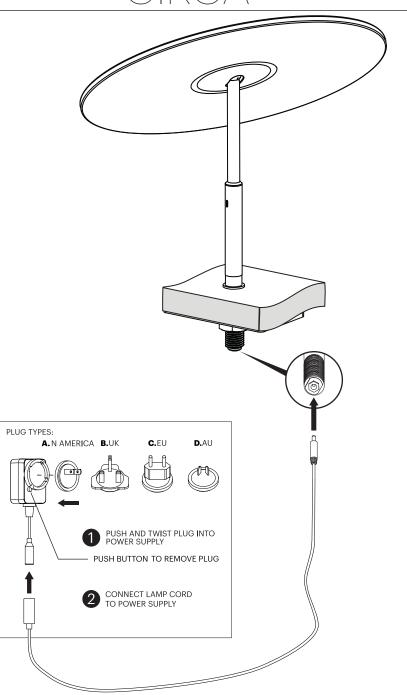


EN: ASSEMBLY


- ♠ THREAD MOUNTING POST INTO MOUNTING PLATE
- ENSURE MOUNTING POST IS THREADED TO ACCOUNT FOR SURFACE MATERIAL THICKNESS
- MARK AND DRILL LOCATION OF LAMP POST.
- I. MARK DESIRED LOCATION OF LAMP ON SURFACE.
- II. USE 7/8 (.875) INCH SPADE DRILL BIT TO DRILL HOLE FOR MOUNTING POST.
- SURFACE THICKNESS

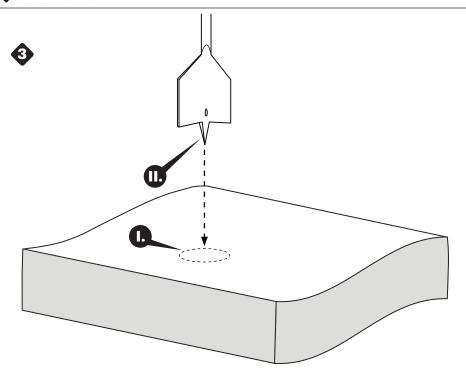

EN: ASSEMBLY

- FASTEN MOUNTING PLATE ONTO THE SURFACE WITH SCREWS PROVIDED.
- *CLICK** LAMP HEAD ONTO LAMP POST AND LAMP POST ONTO SURFACE MOUNT POST UNTIL FLUSH WITH SURFACE
- **TIGHTEN NUT TO MOUNTING POST TO SECURE LAMP POSITION**

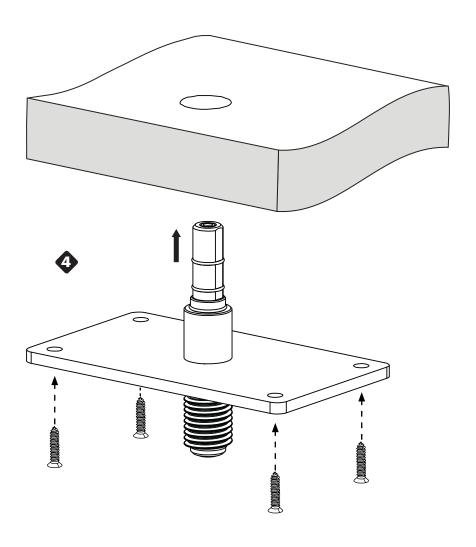

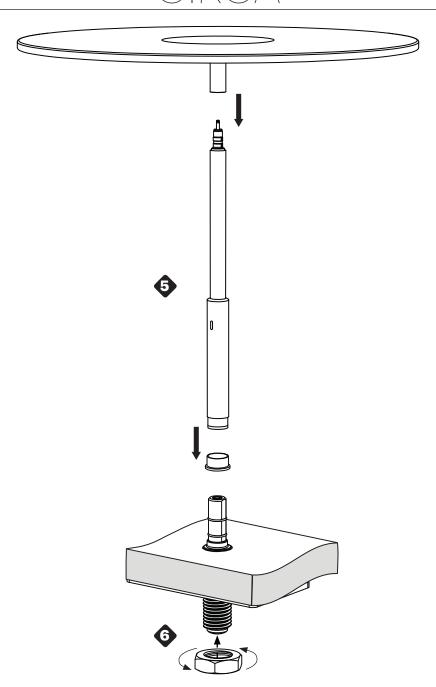

CIRCA FLUSH

120V

ASSEMBLY & INSTALLATION INSTRUCTIONS







CIRCA FI USH

IMPORTANT: WE RECOMMEND FIXTURE BE INSTALLED BY AN ELECTRICIAN


WARNING: FIXTURE MUST BE WIRED CORRECTLY OR RISK DAMAGE TO COMPONENTS

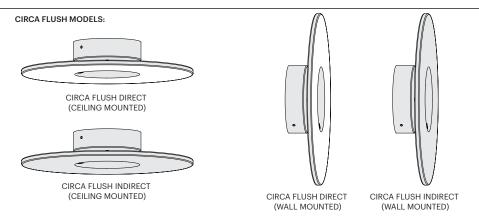


NOTE: INSTRUCTIONS SHOW INSTALLATION OF CIRCA FLUSH DIRECT CEILING MOUNTED, FOLLOW THE SAME INSTRUCTIONS FOR ALL CONFIGURATIONS LISTED ABOVE

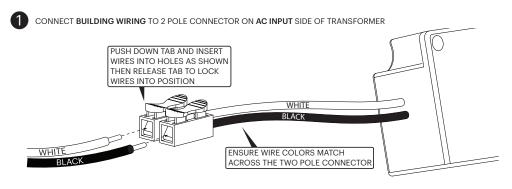


CIRCA FLUSH

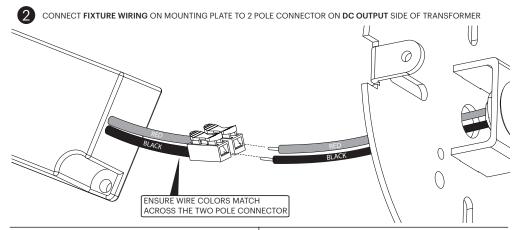

TUCK TRANSFORMER AND WIRING INTO JUNCTION BOX AND SCREW MOUNTING PLATE INTO JUNCTION BOX USING PROVIDED MACHINE SCREWS



FASTEN CANOPY COVER TO MOUNTING PLATE USING PROVIDED MACHINE SCREWS




6

HOLD OUTSIDE OF SHADE WITH BOTH HANDS AND SCREW FIXTURE HEAD INTO CANOPY ASSEMBLY

BULB TYPE LED FLAT PANEL

BULB REPLACEMENT
CONTACT MANUFACTURER
FOR BULB REPLACEMENT

ELECTRONIC LOW VOLTAGE DIMMER RECOMMENDED



CIRCA FLUSH

INFO@PABLODESIGNS.COM 888 MARIN STREET SAN FRANCISCO, CA 94124

PABLODESIGNS.COM